

538039

10/538039

(12) INTERNATIONAL PUBLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
24 June 2004 (24.06.2004)

PCT

(10) International Publication Number
WO 2004/054040 A1

(51) International Patent Classification⁷: **H01R 13/58,**
H02G 15/007

Johan [SE/SE]; Santararavägen 55, S-182 48 Enebyberg (SE).

(21) International Application Number:
PCT/SE2003/001898

(74) Agent: **PANTZAR, Tord**; c/o Atlas Copco Tools AB,
S-105 23 Stockholm (SE).

(22) International Filing Date: 5 December 2003 (05.12.2003)

(81) Designated States (*national*): JP, US.

(25) Filing Language: English

(26) Publication Language: English

(84) Designated States (*regional*): European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR).

(30) Priority Data:
0203624-2 9 December 2002 (09.12.2002) SE

Published:

— with international search report


(71) Applicant (*for all designated States except US*): **ATLAS COPCO TOOLS AB** [SE/SE]; S-105 23 Stockholm (SE).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(72) Inventor; and

(75) Inventor/Applicant (*for US only*): **BRODIN, Hans, Karl,**

(54) Title: MULTI-CONDUCTOR CONNECTOR PLUG

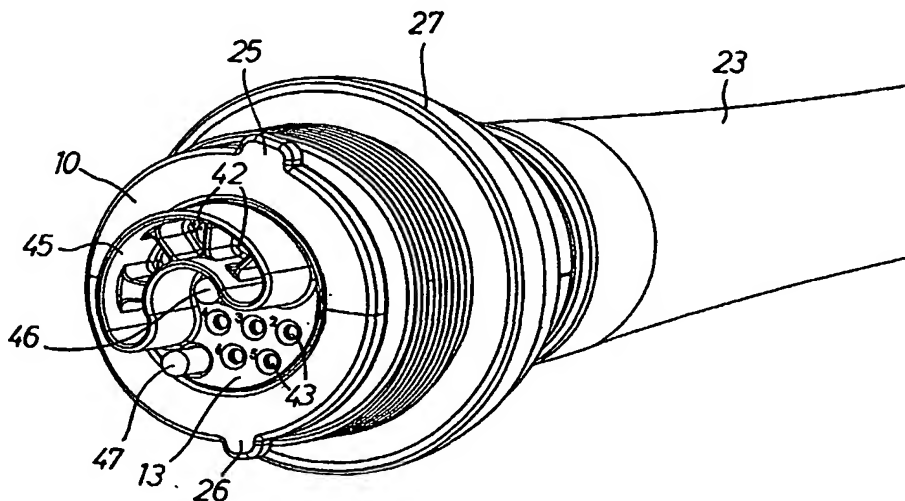

(57) Abstract: A connector plug intended for a multi-conductor cable (12) with a set of power conductors (30) and set of signal conductors (31) and comprising a casing (10) with a rear cable receiving opening (11), a number of contact elements (42, 43) connected to the power and signal conductors (30, 31) and arranged to engage contact elements on a connectable matching connector plug or jack, and a transition chamber (17) located between the rear cable receiving opening (11) and the contact elements (42, 43) and arranged to be penetrated by the power and signal conductors (30, 31), wherein a coiling core element (18, 118) is mounted in the transition chamber (17) to form separate routing paths (40, 41) for the power conductors (30) and the signal conductors (31) such that added lengths and slacks are provided in the conductors (30, 31) for absorbing length changes therein due to bending of the cable (12).

WO 2004/054040 A1

Multi-conductor connector plug.

The invention relates to a connector plug for a multi-conductor cable with a set of power conductors and a set of signal conductors. The connector plug comprises a casing with a cable receiving opening at its rear end, a number of contact elements at its forward end connected to the power and signal conductors and arranged to engage contact elements on a connectable matching plug or jack, and a transition chamber located between the cable receiving opening and the contact elements and arranged to be penetrated by the power and signal conductors.

A problem concerned with previous connector plugs of the above mentioned type is the occurrence of undesired and hazardous strains to which the conductors and the contact elements are exposed to at bending related length changes of the conductors. Such length changes result in alternating pushing and tensioning forces in the conductors when handling the cable, resulting in strain exposure on the conductors and contact elements and ultimate fatigue breakdowns. It does not matter that the cable is longitudinally fixed to the connector plug casing, the separate conductors inside the cable are still exposed to this type of length changes and strain exposure at bending of the cable. This means a less reliable function and a limited service life of the connector plug.

The main object of the invention is to provide an improved connector plug of the above described type wherein the conductors and contact elements are protected from undesirable tension forces at bending of the cable.

Another object of the invention is to provide an improved connector plug suitable for connecting an electric power tool, for instance a power wrench, to a drive and control unit via a multi-conductor cable

Preferred embodiments of the invention are described below with reference to the accompanying drawings.

In the drawings

Fig. 1 shows a perspective end view of a connector plug according to the invention.

Fig. 2 shows an end view of the connector plug in Fig. 1.

Fig. 3 shows a perspective side view of the connector plug in Fig. 1 with a part of the casing removed exposing the transition chamber and the coiling core element.

Fig. 4 shows a longitudinal section along line A-A in Fig. 2.

Fig. 5 shows a longitudinal section along line B-B in Fig. 2.

Fig. 6 shows a longitudinal section through line C-C in Fig. 2.

Fig. 7 shows a longitudinal section through a connector plug according to an alternative embodiment of the invention.

Fig. 8 shows an end part of a flat type multi-conductor cable with a tension line and a stop member, whereas for clarity the dispositions of the power and signal conductors are illustrated by circles in the end surface of the cable.

The connector plug according to the invention, as illustrated by the described examples, is suitable for connection of an electric power tool, such as a power wrench, to a separate drive and control unit. In such an application the power conductors supply electric power to the tool, whereas the signal conductors communicate operation related signals from sensors and/or maneuver means on the tool to the drive and control unit.

The connector plug shown in Figs. 1-6 comprises a casing 10 with an open front end and a rear opening 11 for receiving a multi-conductor cable 12. In the front part of the casing

10 there is mounted a connector piece 13, a mounting member 14 for contact elements, and a conductor support plate 15, all made of a non-conducting material. The purpose of the conductor support plate 15 is to prevent bending forces in the conductors from affecting the contact elements. Depending on what type of contact elements are used, the connector piece 13 and the mounting member 14 may be formed in one piece. A sleeve portion 16 embraces and forms a mounting socket for the support plate 15. The casing 10, which in fact is longitudinally divided into two shells, comprises a transition chamber 17 for passing of the conductors of the cable 12. In the transition chamber 17 there is mounted a coiling core element 18 which is intended to accomplish added length and a slack of the conductors as described in further detail below. For practical reasons, also explained below, the coiling core element 18 is divided in two halves.

The connector piece 13, the contact element mounting member 14, the conductor support plate 15 and the coiling core element 18 are all retained between two opposite shoulders 19,20 in the casing 10. At its rear end, the casing 10 is formed with a neck portion 22 on which is received an elastic cable supporting sleeve 23. At its rear end, the neck portion 22 is formed with a hook shaped flange 24 for locking the sleeve 23 to the casing 10. See Fig. 5.

At its forward end, the casing 10 is provided with two laterally directed heels 25,26 which form shoulders to be engaged by a sleeve nut 27 located on the outside of the casing 10. The sleeve nut 27 is intended to co-operate with an internally threaded socket portion of a connectable matching plug or jack (not shown) to retain the connector plug in an interconnected position relative to such jack. As can be seen in Figs. 1 and 2, the heels 25,26 are not located diametrically opposite each other but have a slight asymmetric disposition. The heels 25,26 are arranged to co-

operate with matching likewise asymmetrically located openings in a jack, thereby guaranteeing a correct angular position relative to such jack when interconnecting the two parts.

The cable 12 connected to the plug is a flat type cable comprising a set of big size power transmitting conductors 30 and a set of small size conductors 31 for transmitting electric signals. The cable used in the described embodiments of the invention is illustrated in Fig. 8 and further described in E.P. 0 667 980. The cable 12 comprises three sections, namely a first section 32 including the set of power transmitting conductors 30 including shielding and earth ground conductors (not specifically shown), and a second section 33 including the set of small size signal transmitting conductors 31 also including one or more non-illustrated shielding conductors. The cable 12 comprises furthermore a third intermediate section 34 including a non-conducting cable support line 35 for relieving occurring tension forces in the cable 12. The support line 35 is provided with a stop member 37 to be coupled to the coiling core element 18 via a socket portion 38 in the latter. See Fig. 8. The stop member 37 is fitted into the socket portion 38 in that the two halves of the coiling core element 18 are separated to make access to the socket portion 38 for the stop member 37. To enable this, the two shells of the casing 10 has to be separated as well. When the stop member 37 is properly located in the socket portion 38, i.e. when the two halves of the coiling core element 18 are reassembled, the casing 10 and the nut 27 will lock the halves of the coiling core element 18 together.

When passing through the transition chamber 17 the sets of power conductors 30 are kept separated from the signal conductors 31 to minimise the influence of the inevitable electric fields around the power conductors 30 on the low

voltage signals transmitted through the signal conductors 31. Also from the safety point of view the high voltage power conductors are kept well separated from the low voltage signal conductors, which means that there is low risk for the signal transferring system to be exposed to a hazardous high voltage. Throughout the length of the cable 12 the power conductors 30 are separated from the signal conductors 31 by the intermediate tension line section 34, and to keep that separation through the transition chamber 17 there are provided two separate screw shaped conductor routing paths 40,41. See Figs. 3-6. These routing paths are formed by two screw shaped channels on the coiling core element 18. This means that the set of power conductors 30 is routed through one of the screw shaped paths 41, whereas the set of signal conductors 31 is routed through the other screw shaped path 40. The two screw shaped routing paths 40,41 extend over about 360° and add a certain length to the conductor sets. Through this added length there is also provided a certain amount of slack in the conductor sets 30,31 which serves to protect the contact elements and their connection to the conductors from being exposed to tension forces due to bending of the cable. In the perspective view shown in Fig.3 one of the casing shells are removed and the nut 27 is retracted to make visible the separated conductor routing paths 40,41 for the power conductors 30 and the signal conductors 31.

In the mounting member 14 and the connector piece 13 there are secured five contact elements 42 connected to the power conductors 30, including shielding and earth ground conductors, and five contact elements 43 connected to the signal and shielding conductors 31. All contact elements 42,43 have the form of sleeves intended to receive contact pins of a matching male type plug or jack. This means that the shown plug is a female plug. For safety reasons the power contact sleeves 42 are located inside a banana-shaped socket 45 on the front end surface of the contact piece 13.

This socket 45 is intended to protect the operator and others from the power voltage and to guide the plug during the plug-in phase. When the plug is properly interconnected with a matching male plug or jack the socket 45 is to be received in a correspondingly shaped guide recess in that jack or plug.

The plug is also provided with two code pins 46,47 which are non-conducting and intended to identify characteristics of, for instance, the voltage transferred by the cable and/or the type of power tool connected to the cable. A plug provided with one of these code pins can, for example, not be erroneously interconnected with a plug or jack having a code pin in the very same position indicating that it is connected to a power source of a different voltage or a power tool requiring a different voltage.

As to alternative plug designs, the threaded nut sleeve 27, for example, may be exchanged by a bayonet-type coupling. The code pins 46,47 may also be exchanged by connector pins as required.

In Fig. 7, there is illustrated an alternative plug design wherein the coiling core element 118 is formed with two oppositely directed tubular trunnion-like studs 119,120 forming coiling means for winding and routing separately the power conductors 30 and the signal conductors 31 through the transition chamber 17. As in the above described embodiment of the invention, the extended routing of the conductors 30,31 through the transition chamber 17 means that there is added extra length and a certain amount of slack in the conductors 30,31 to prevent tension forces to occur in the conductors and the contact elements 42,43 at bending of the cable 12.

Claims.

1. Connector plug for a multi-conductor cable (12) including a set of power conductors (30) and a set of signal conductors (31), comprising a casing (10) with a cable receiving opening (11) at its rear end, a number of contact elements (42,43) at its forward end connected to said power conductors (30) and said signal conductors (31) and arranged to engage contact elements on a connectable matching connector plug or jack, and a transition chamber (17) located in said casing (10) between said cable receiving opening (11) and said contact elements (42,43) and penetrated by said power conductors (30) and said signal conductors (31),
c h a r a c t e r i z e d in that said transition chamber (17) comprises a coiling core element (18;118) mounted in said casing (10) and forming a separate routing path (41,42) for each one of said set of power conductors (30) and said set of signal conductors (31), wherein each routing path (40,41) provides an added length and a slack in each one of said set of power conductors (30) and said set of signal conductors (31) for absorbing cable bending related length changes of said power conductors (30) and said signal conductors (31).
2. Connector plug according to claim 1, wherein said coiling core element (118) comprises two oppositely located trunnion like studs (119,120), each one of said studs (119,120) extends in a direction transverse to the longitudinal direction of the casing (10) and forms a routing path defining winding core for either one of said sets of power conductors (30) and signal conductors (31).
3. Connector plug according to claim 1, wherein said coiling core element (18) comprises two screw shaped external channels extending symmetrically about an axis which extends substantially in the longitudinal direction

of the casing (10), said channels forming said routing paths (40,41) through said transition chamber (17).

4. Connector plug according to anyone of claims 1 - 3, wherein an anchoring device (37,38) is provided for securing the cable (12) to the casing (10), said anchoring device (37,38) comprises a non-conductive tension wire (35) extending throughout the cable (12) in parallel with said power conductors (30) and said signal conductors (31), said tension wire (35) is connected to said coiling core element (18;118).

5. Connector plug according to claim 4, wherein said anchoring device (37,38) comprises a stop member (37) rigidly secured to said tension wire (35), said coiling core element (18;118) is formed with a socket portion (38) for receiving and positively locking said stop member (37) relative to said coiling core element (18;118).

6. Connector plug according to anyone of claims 1-5, wherein a conductor support plate (15) of a non-conductive material is mounted in the casing (10) between said coiling core element (18;118) and said contact elements (42,43), said support plate (15) is disposed in a plane transverse to the longitudinal direction of the casing (10) and comprises a through aperture for each conductor (30,31).

7. Connector plug according to claim 6, wherein said support plate (15) is made of a resilient material.

1/3

FIG 1

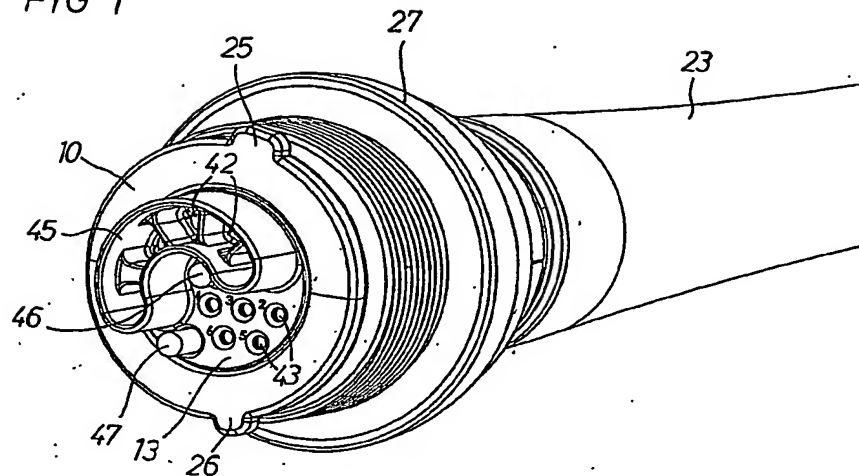


FIG 2

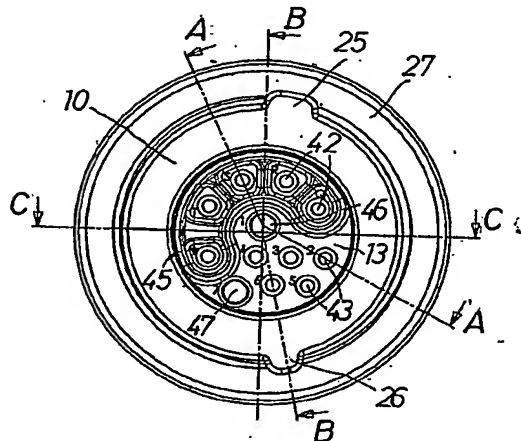


FIG 8


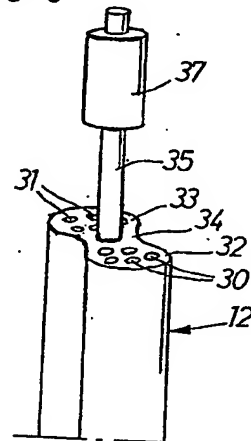


FIG 3

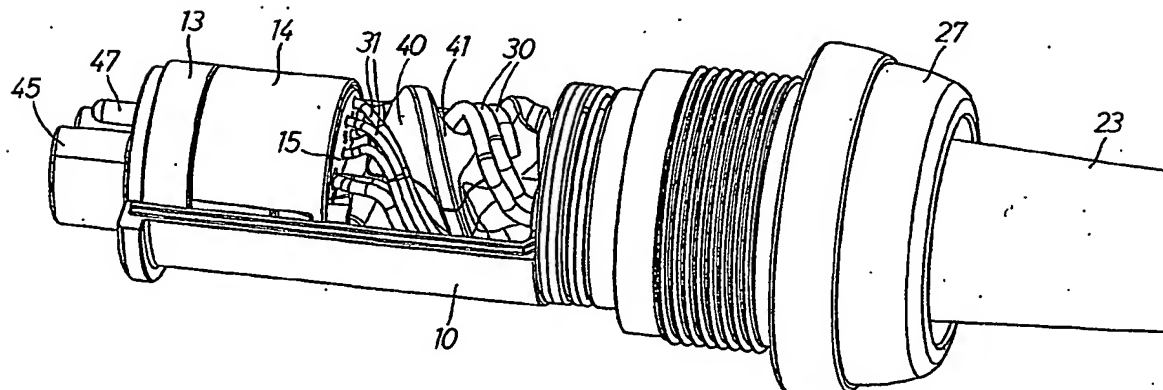

2/3

BEST AVAILABLE COPY

FIG 4

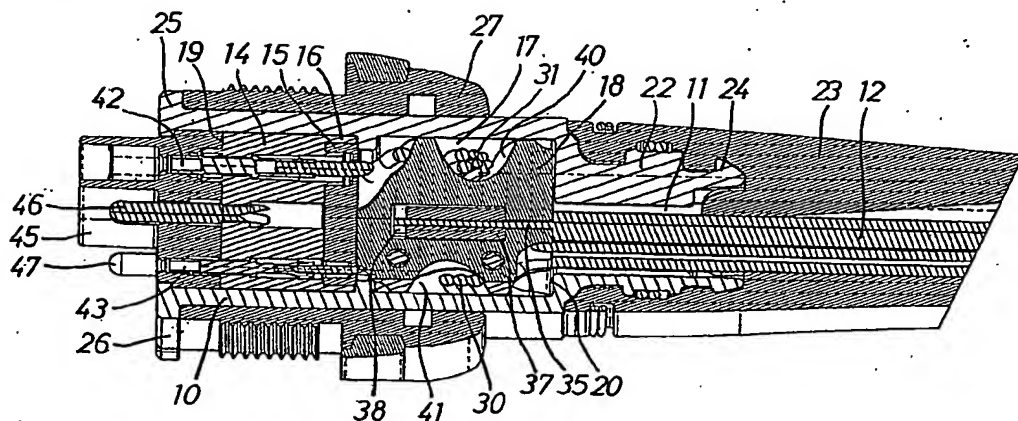


FIG 5


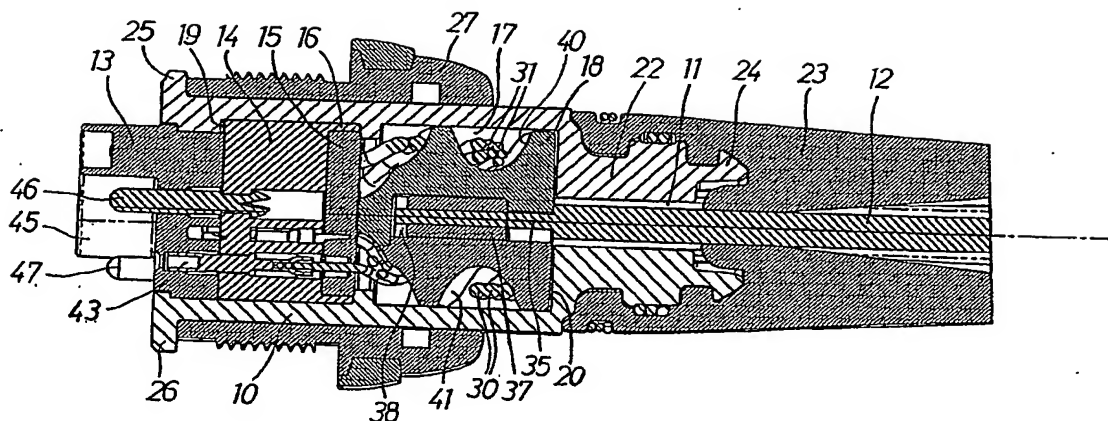



FIG 6

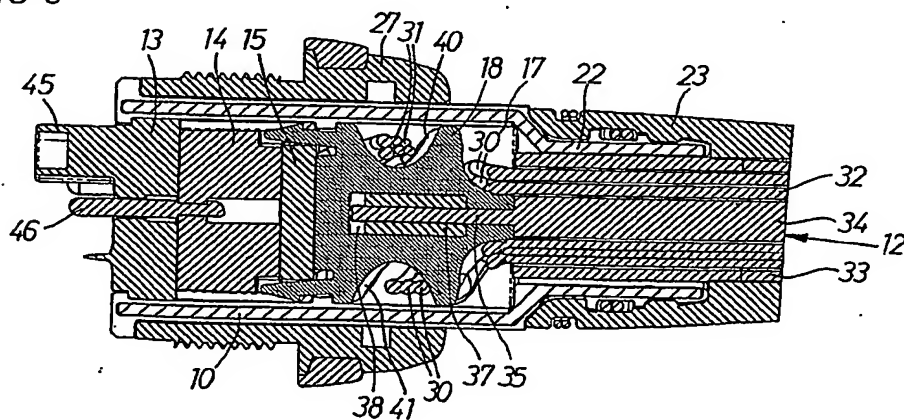

3/3

BEST AVAILABLE COPY

FIG 7

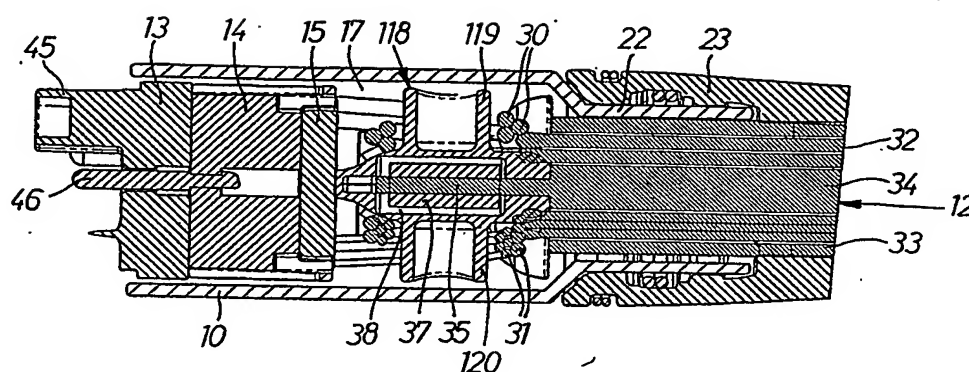

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 2003/001898

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H01R 13/58, H02G 15/007

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H01R, H02G

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

WPI DATA, EPO-INTERNAL

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 9003247 U1 (KLUNKER, H. DIPL. ING ET AL), 23 May 1990 (23.05.1990), page 4, line 10 - page 8, line 31, figures 1,2 --	1-7
A	US 5416273 A (WENDELL C. MACIEJEWSKI), 16 May 1995 (16.05.1995), see whole document --	1-7
A	WO 9411887 A1 (ATLAS COPCO TOOLS AB), 26 May 1994 (26.05.1994), abstract, see the figures --	1-7
A	US 6027375 A (KUN-TSAN WU), 22 February 2000 (22.02.2000), figure 5, abstract --	1-7

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier application or patent but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
- "&" document member of the same patent family

Date of the actual completion of the international search

22 January 2004

Date of mailing of the international search report

18-02-2004

Name and mailing address of the ISA/
Swedish Patent Office
Box 5055, S-102 42 STOCKHOLM
Facsimile No. +46 8 666 02 86

Authorized officer

Kerstin Waczinska/MN
Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

International application No.
PCT/SE 2003/001898

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 4234362 C1 (ROEDERSTEIN SPEZIALFABRIKEN FÜR BAUELEMENTE DER ELEKTRONIK UND KONDENSATOREN), 23 December 1993 (23.12.1993), see whole document -----	1-7

INTERNATIONAL SEARCH REPORT

Information on patent family members

24/12/2003

International application No.

PCT/SE 2003/001898

DE	9003247	U1	23/05/1990	GB	8906461 D	00/00/0000
US	5416273	A	16/05/1995	NONE		
WO	9411887	A1	26/05/1994	CA	2148927 A	26/05/1994
				DE	69312080 D,T	26/02/1998
				EP	0667980 A,B	23/08/1995
				ES	2106371 T	01/11/1997
				SE	502953 C	26/02/1996
				SE	9203340 A	10/05/1994
				US	5750932 A	12/05/1998
US	6027375	A	22/02/2000	TW	414397 Y	00/00/0000
DE	4234362	C1	23/12/1993	NONE		